

巨木岩石工具生产的顶锤产品主要用于地质勘探、煤矿、水利水电、公路、铁路、桥梁、建设施工等。

The DrillMore top hammer drill bit is mainly used in geological exploration, coal mine, water conservancy and hydropower highway, railway, bridge, construction etc.



导向系列钻头/ Retrac Button Bit

头部规格 Specification		钻头头部直径 Head Diameter (mm)	钎头长度 (不含合金) Length (without Button)	水孔数量 Holes		合金数量X直径 Button qty pcs X dia.mm			重量 Weight (Kg)
钻头规格 Specifications	头部形状 Head Shape			面水孔 Port Holes	边水孔 Side Holes	齿型 Button Type (可选 Optional)	边齿 Gauge Buttons	芯齿 Front buttons	
	R32								
	平面 Flat Face	51	130	3	/	球齿+球齿 Domed+Domed	6- ϕ 10	3- ϕ 9	1.25
	平面 Flat Face	57	130	3	/	弹头齿 Ballistic	6- ϕ 10	3- ϕ 9	1.65
	R38								
	平面 Flat Face	64	140	3	/	球齿+弹头齿 Domed+Ballistic	6X ϕ 11	3- ϕ 9	2.05
	中心下陷 Center Drop Face	76	160	4	/	球齿+球齿 Domed+Domed	8- ϕ 11	5- ϕ 11	3.65
	中心下陷 Center Drop Face	89	170	4	/	球齿+球齿 Domed+Domed	8- ϕ 12	4- ϕ 12+2- ϕ 10	5.3
	T38								
	中心下陷 Center Drop Face	64	160	2	/	球齿+球齿 Domed+Domed	8- ϕ 9	5- ϕ 9	2.45
	平面 Flat Face	70	160	3	/	球齿+球齿 Domed+Domed	6- ϕ 11	4- ϕ 9	2.85
	中心下陷 Center Drop Face	76	160	4	/	球齿+球齿 Domed+Domed	8- ϕ 11	5- ϕ 11	3.7
	中心下陷 Center Drop Face	89	170	4	/	抛物线+抛物线 Parabola+Parabola	8- ϕ 12	4- ϕ 12+2- ϕ 10	5.3
	T45								
	中心下陷 Center Drop Face	72	160	4	/	球齿+球齿 Domed+Domed	8- ϕ 11	5- ϕ 10	3.15
	中心下陷 Center Drop Face	76	160	4	/	球齿+球齿 Domed+Domed	8- ϕ 12	4- ϕ 11+1- ϕ 10	3.55
	中心下陷 Center Drop Face	89	170	4	/	弹头齿+弹头齿 Ballistic+Ballistic	8- ϕ 12	4- ϕ 12+2- ϕ 10	5
	中心下陷 Center Drop Face	102	180	4	/	球齿+球齿 Domed+Domed	8- ϕ 13	6- ϕ 12	7.3
	T51								
	中心下陷 Center Drop Face	89	170	4	/	弹头齿+弹头齿 Ballistic+Ballistic	8- ϕ 12	4- ϕ 12+2- ϕ 11	5
	中心下陷 Center Drop Face	102	180	4	/	弹头齿+弹头齿 Ballistic+Ballistic	8- ϕ 13	4- ϕ 13+2- ϕ 12	7.12
	平面 Flat Face	115	185	2	2	球齿+球齿 Domed+Domed	8- ϕ 14	6- ϕ 13	10.1
	中心下陷 Center Drop Face	127	185	4	/	球齿+球齿 Domed+Domed	8- ϕ 14	4- ϕ 14+3- ϕ 13	12.4
	ST58								
	平面 Flat Face	102	180	3	/	抛物线+抛物线 Parabola+Parabola	9- ϕ 13	6- ϕ 12	6.5
	平面 Flat Face	115	185	2	2	球齿+球齿 Domed+Domed	8- ϕ 14	6- ϕ 13	9.5
	中心下陷 Center Drop Face	127	185	4	/	球齿+球齿 Domed+Domed	8- ϕ 14	4- ϕ 14+3- ϕ 13	11.7
	GT60山特维克款								
	平面三角形 Flat Triangle Face	102	212	3	/	球齿+球齿 Domed+Domed	9- ϕ 13	9- ϕ 11	10
	平面三角形 Flat Triangle Face	115	212	3	/	球齿+球齿 Domed+Domed	9- ϕ 14	10- ϕ 12	8
	平面三角形 Flat Triangle Face	127	212	3	/	球齿+球齿 Domed+Domed	9- ϕ 16	10- ϕ 14	13.9
	平面三角形 Flat Triangle Face	140	225	3	/	球齿+球齿 Domed+Domed	9- ϕ 16	10- ϕ 14	17.4

导向系列钻头/Retrac Button Bit

钻头规格 Specifications	头部规格 Specification		钻头头部直径 Head Diameter (mm)	钎头长度 (不含合金) Length (without Button)	水孔数量 Holes		合金数量X直径 Button qty pcs X dia.mm			重量 Weight (Kg)
	头部形状 Head Shape				面水孔 Port Holes	边水孔 Side Holes	齿型 Button Type (可选 Optional)	边齿 Gauge Buttons	芯齿 Front buttons	
	EL60款									
	中心下陷 Center Drop Face	102	200	3	/	球齿+球齿 Domed+Domed	9- ϕ 14	7- ϕ 13	6.5	
	中心下陷 Center Drop Face	115	200	4	/	球齿+球齿 Domed+Domed	8- ϕ 14	4- ϕ 14+2- ϕ 13	9	
	中心下陷 Center Drop Face	127	205	4	/	球齿+球齿 Domed+Domed	8- ϕ 14	4- ϕ 14+3- ϕ 13	12	
	ST68									
	中心下陷 Center Drop Face	102	185	4	/	球齿+球齿 Domed+Domed	8- ϕ 14	4- ϕ 13+2- ϕ 12	6.1	
	中心下陷 Center Drop Face	115	185	4	/	球齿+球齿 Domed+Domed	8- ϕ 14	4- ϕ 14+2- ϕ 13	8.4	
	中心下陷 Center Drop Face	127	190	4	/	球齿+球齿 Domed+Domed	8- ϕ 14	4- ϕ 14+3- ϕ 13	11.4	
	中心下陷 Center Drop Face	140	190	4	/	球齿+球齿 Domed+Domed	8- ϕ 16	4- ϕ 14+3- ϕ 13	14.3	
	T45 山特维克款									
	梅花槽 Triangle Face	89	170	4	/	球齿+球齿 Domed+Domed	8- ϕ 13	5- ϕ 13	5	
	平面三角形 Flat Triangle Face	102	175	3	/	球齿+球齿 Domed+Domed	9- ϕ 13	9- ϕ 11	7.25	
	平面三角形 Flat Triangle Face	115	175	3	/	球齿+球齿 Domed+Domed	9- ϕ 14	10- ϕ 12	9.5	
	T51 山特维克款									
	平面三角形 Flat Triangle Face	102	185	3	/	球齿+球齿 Domed+Domed	9- ϕ 13	9- ϕ 11	7.5	
	平面三角形 Flat Triangle Face	115	185	3	/	球齿+球齿 Domed+Domed	9- ϕ 14	10- ϕ 12	10	
	平面三角形 Flat Triangle Face	127	185	3	/	球齿+球齿 Domed+Domed	9- ϕ 14	10- ϕ 13	12.8	

| 螺纹系列钻头/Normal Button Bit

钻头规格 Specifications	头部规格 Specification 头部形状 Head Shape	钻头头部直径 Head Diameter (mm)	钎头长度 (不含合金) Length (without Button)	水孔数量 Holes		合金数量X直径 Button qty pcs X dia.mm			重量 Weight (Kg)
				面水孔 Port Holes	边水孔 Side Holes	齿型 Button Type (可选 Optional)	边齿 Gauge Buttons	芯齿 Front buttons	
	平面 Flat Face	38	105	1	2	弹头齿 Ballistic	5- ϕ 8	2- ϕ 8	0.5
	平面 Flat Face	45	110	3	2	弹头齿 Ballistic	6- ϕ 9	3- ϕ 8	0.65
	平面 Flat Face	45	113	3	2	弹头齿 Ballistic	6- ϕ 9	3- ϕ 8	0.75
	平面 Flat Face	64	130	2	/	球齿 Domed	6- ϕ 10	4- ϕ 9	2.1
	凸面 Convex Face	76	130	2	/	球齿 Domed	6- ϕ 12	2 ϕ 12+2- ϕ 10	2.7
	中心下陷 Center Drop Face	64	130	3	/	球齿+弹头齿 Domed+Ballistic	6X ϕ 11	3- ϕ 9	1.85
	中心下陷 Center Drop Face	76	130	2	2	球齿+球齿 Domed+Domed	8- ϕ 12	4- ϕ 12	2.45
	中心下陷 Center Drop Face	89	130	2	2	球齿+球齿 Domed+Domed	8- ϕ 12	6- ϕ 12	3.5
	中心下陷 Center Drop Face	64	130	2	/	球齿+球齿 Domed+Domed	8- ϕ 9	5- ϕ 9	1.85
	平面 Flat Face	70	130	3	2	球齿+球齿 Domed+Domed	6- ϕ 12	4- ϕ 10	2.05
	中心下陷 Center Drop Face	76	130	4	/	球齿+球齿 Domed+Domed	8- ϕ 11	5- ϕ 10	2.55
	中心下陷 Center Drop Face	89	130	4	/	抛物线+抛物线 Parabola+Parabola	8- ϕ 12	4- ϕ 12+2- ϕ 10	3.55
	中心下陷 Center Drop Face	72	140	4	/	球齿+球齿 Domed+Domed	8- ϕ 11	5- ϕ 10	2.25
	中心下陷 Center Drop Face	76	140	4	/	球齿+球齿 Domed+Domed	8- ϕ 11	4- ϕ 11+1- ϕ 10	2.9
	中心下陷 Center Drop Face	89	145	4	/	弹头齿+弹头齿 Ballistic+Ballistic	8- ϕ 12	4- ϕ 12+2- ϕ 10	3.8
	中心下陷 Center Drop Face	102	150	4	/	球齿+球齿 Domed+Domed	8- ϕ 13	6- ϕ 12	4.8
	中心下陷 Center Drop Face	89	155	4	/	弹头齿+弹头齿 Ballistic+Ballistic	8- ϕ 12	4- ϕ 12+2- ϕ 11	4.15
	中心下陷 Center Drop Face	102	155	4	/	弹头齿+弹头齿 Ballistic+Ballistic	8- ϕ 14	4- ϕ 13+2- ϕ 12	5.8
	平面 Flat Face	115	160	2	2	球齿+球齿 Domed+Domed	8- ϕ 14	6- ϕ 13	6.55
	中心下陷 Center Drop Face	127	165	4	/	球齿+球齿 Domed+Domed	8- ϕ 14	4- ϕ 14+3- ϕ 13	7.7
	中心下陷 Center Drop Face	89	175	4	/	弹头齿+弹头齿 Ballistic+Ballistic	8- ϕ 12	4- ϕ 12+2- ϕ 11	4.4
	平面 Flat Face	102	180	3	/	抛物线+抛物线 Parabola+Parabola	9- ϕ 13	6- ϕ 12	5.8
	平面 Flat Face	115	185	2	2	球齿+球齿 Domed+Domed	8- ϕ 14	6- ϕ 13	7.7
	中心下陷 Center Drop Face	127	185	4	/	球齿+球齿 Domed+Domed	8- ϕ 14	4- ϕ 14+3- ϕ 13	8.9
	平面三角形 Flat Triangle Face	102	220	3	/	球齿+球齿 Domed+Domed	9- ϕ 13	9- ϕ 11	8.1
	平面三角形 Flat Triangle Face	115	220	3	/	球齿+球齿 Domed+Domed	9- ϕ 14	10- ϕ 12	8.8
	平面三角形 Flat Triangle Face	127	225	3	/	球齿+球齿 Domed+Domed	9- ϕ 16	10- ϕ 14	10.6
	平面三角形 Flat Triangle Face	140	230	3	/	球齿+球齿 Domed+Domed	9- ϕ 16	10- ϕ 14	11.7

螺纹系列钻头/Normal Button Bit

头部规格 Specification

钻头规格 Specifications

头部形状 Head Shape

钻头头部直径 Head Diameter (mm)

钎头长度 (不含合金) Length (without Button)

水孔数量 Holes

面水孔 Port Holes

边水孔 Side Holes

合金数量X直径 Button qty pcs X dia.mm

齿型 Button Type (可选 Optional)

边齿 Gauge Buttons

芯齿 Front buttons

重量 Weight (Kg)



ST68

平面 Flat Face	102	180	2	2	球齿+球齿 Domed+Domed	8- 14	6 13	5.4
中心下陷 Center Drop Face	115	180	4	/	球齿+球齿 Domed+Domed	8- 14	4- 14+2- 13	6.65
中心下陷 Center Drop Face	127	190	4	/	球齿+球齿 Domed+Domed	8- 14	4- 14+3- 13	8.9
中心下陷 Center Drop Face	140	190	4	/	球齿+球齿 Domed+Domed	8- 16	4- 14+3- 13	10.8




T45

梅花槽 Triangle Face	89	145	4	/	球齿+球齿 Domed+Domed	8- 13	5- 13	3.5
平面三角形 Flat Triangle Face	102	150	3	/	球齿+球齿 Domed+Domed	9- 13	9- 11	4.5
平面三角形 Flat Triangle Face	115	160	3	/	球齿+球齿 Domed+Domed	9- 14	10- 12	5



T51


平面三角形 Flat Triangle Face	102	155	3	/	球齿+球齿 Domed+Domed	9- 13	9- 11	5.5
平面三角形 Flat Triangle Face	115	165	3	/	球齿+球齿 Domed+Domed	9- 14	10- 12	6.5
平面三角形 Flat Triangle Face	127	165	3	/	球齿+球齿 Domed+Domed	9- 14	10- 13	7.5




EL60

平面 Flat Face	102	210	2	2	球齿+球齿 Domed+Domed	8- 14	6 13	7.5
中心下陷 Center Drop Face	115	210	4	/	球齿+球齿 Domed+Domed	8- 14	4- 14+2- 13	8.2
中心下陷 Center Drop Face	127	220	4	/	球齿+球齿 Domed+Domed	8- 14	4- 14+3- 13	10

顶锤扩孔钻头

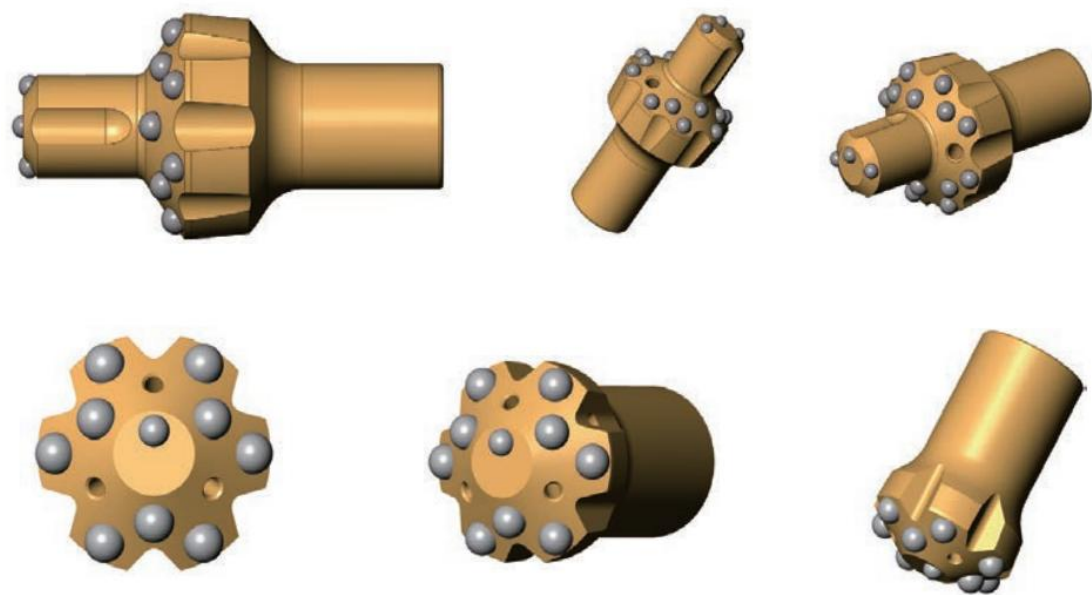

螺纹扩孔钻头规格 / Thread Opener Bits

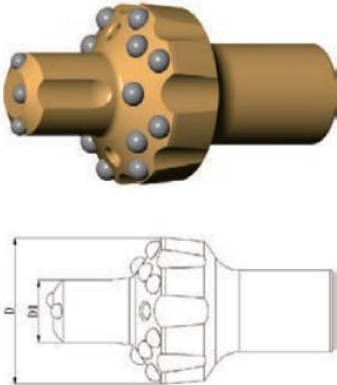头部规格 Specification		具体尺寸 Specific Detailed Size								
钻头规格 Specifications										
	D(mm)	76	89	102	115	102	115	127	140	165
	D1(mm)	26	43	43	76	43	76	76	89	102
	螺纹规格	R32	R32	R38	R38	T38	T38	T45	T45	T51

备注:扩孔钻头的导向尺寸与扩孔尺寸, 合金大小, 可根据客户要求设计。

Coupling Sleeves

钎杆连接套



产品材质：主体采用优质合金钢为原料

工艺：采用先进的高压锻制生产工艺，真空整体调质热处理。应用数控自动化设备加工成型，保证了稳定可靠的产品质量

用途：连接钻杆和钻机；连接钻杆与钻杆；连接钻杆与钻头。

Product Material: Alloy Steel

Process: use the most advanced forging process and heat treatment technology with the latest automated equipment to ensure quality control.

Use: connecting drill rod and drilling rig; connecting drill rod and drill rod; connecting drill rod and drill bit.

连接套常用规格

		具体尺寸 Specific Detailed Size					
连接套螺纹型号	T38-R32	T38-T38	T38-T45	T38-T51	T45-T45	T51-T51	
外径(D) mm	56	56	68	74	68	77	
长度(L) mm	170	190	200	210	210	230	

备注:连接套的长度/外径尺寸，可根据客户需求定制

Shank Adapter Tubes

钎尾

新金刚为客户提供适配Epiroc（Atlas Copco），Furukawa，Montabert及Tamrock等系列机型的顶锤钎尾。钎尾选用高强度材料，为客户提供更长工作寿命。

New Diamond provides Shank adapters for difters of Epiroc(Atlas Copco), Furukawa, Montabert and Tamrock series. We choose high quality material for shank adapters to provide longer working life.

